



Lockout Tagout Tags

Fact Sheet

Part# LOTO, LLWT



OSHA Format



ANSI Format

Lockout Tags are a component of the Lockout Tagout procedure to protect workers from dangerous releases of power or sudden re-energizing of machinery during routine maintenance or repair operations.

Key Features:

- Accepts pen, pencil and permanent marker
- Withstands 50 lbs. of pull force.
- Optional clear self-laminating cover.
- Available in both ANSI and OSHA formats.
- Many stock legends to choose from. Custom legends available upon request.

Applications: For indoor / temporary outdoor use

Applicable Codes: Compliant with OSHA 29 CFR 1910 and ANSI Z535.

Material: 15 mil PVC with a 0.4375" dia. metal eyelet.


Size: 3.25" x 6"

Rigid PVC

Pull Force: 50 lbs.

Application: Indoor / Temporary Outdoor

Accepts: Pen, Pencil, Permanent Marker

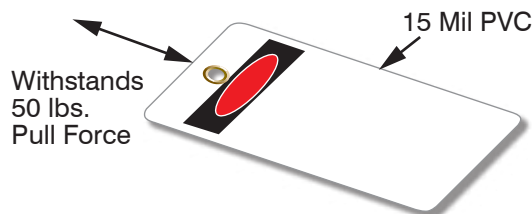

Self Laminating Style (Rigid PVC with clear self laminating polyester cover)

Pull Force: 50 lbs.

Application: Indoor / Temporary Outdoor

Accepts: Pen, Pencil, Permanent Marker

