



Texas Roll Flagging


Texas Embossed | Material Spec Sheet

DESCRIPTION:

Presco's Texas Roll Flagging Tape to have maximum durability and superior weathering qualities. This non-adhesive, Texas-shaped embossed tape is used in surveying, forestry, nursery, geophysics and so much more.

COLORS:

STANDARD COLORS

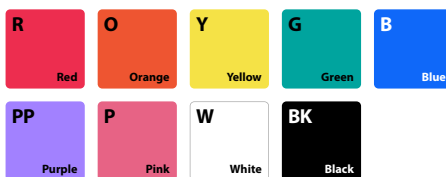

GLO COLORS



THICKNESS:

Standard Colors: 2.0 mil (+/- 0.5 mil)
Glo Colors: 3.0 mil (+/- 0.5 mil)

DENSITY:

1.34 g/cc
ASTM D-792

SLIT WIDTH:

1.1875" (+/- 0.652") *Custom Widths Available*

CORE SIZE:

1 5/8" ID

HARDNESS:

84 Shore 'A', 5 Sec. (+/- 5) | ASTM D-2240

ROLL DIAMETER:

3" Approx.

TENSILE STRENGTH:

MD: 2800 psi minimum | ASTM D-882

ELONGATION:

MD: 280% minimum | ASTM D-882

COLD CRACK:

-20° F (+/- 10) | Fed Std 191 Method 5874

COLOR FASTNESS:

Standard Colors: 500 hrs
Glo Colors: 335 hrs
ASTM G155

